

NEW

aumüller  
auf. zu. mehr.

## Smart Vent Box

The compact control modules for the convenient implementation of ventilation systems.

- Can be retrofitted into existing systems with SHEV control units
- Alternatively can be used in combination with a 24 V power supply unit
- Easy to integrate into any standard flush-mounted box



# Installation and integration in seconds.


The Smart Vent Box fits into any standard flush-mounted box. A cabling system using spring-loaded terminals, automated teach-in at the touch of a button and an immediate test run via an integrated ventilation push-button enable quick and easy installation.

## SVB FLEX

NEW



- Custom setting of the opening speed and the maximum opening width for ventilation operation
- Immediate test run possible due to integrated ventilation button

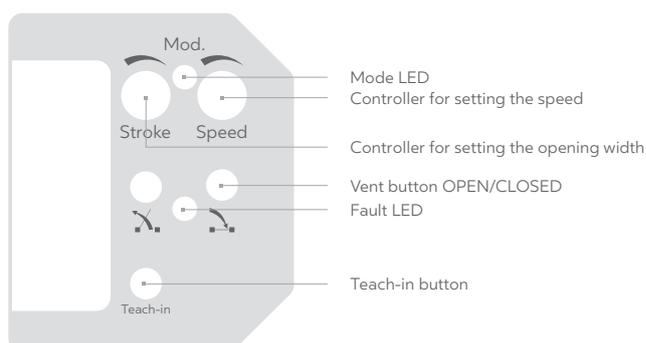

### Features and technical data

Operating voltage	24 V DC
Connections	1 x drive group 1 x input for external, higher-level signals 1 x vent button connection
Ambient temperature	-5°C to +40°C
Dimensions (WxHxD)	40.5 x 48.5 x 28.3 mm
Terminals	9 x spring-loaded terminals, max. 1.5 mm <sup>2</sup>
Protection class	IP20


### Ordering data

Item name	SVB Flex
Item No.	660110



# SVB 0-10 V

**NEW**

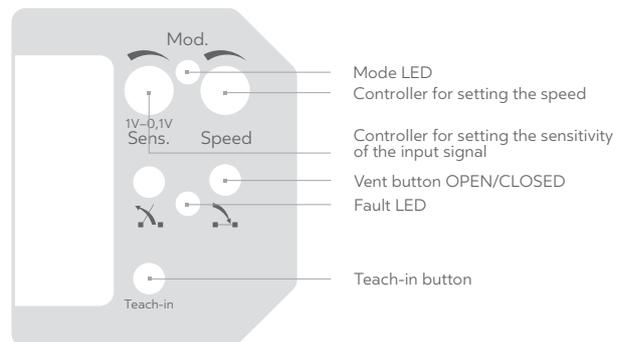

- Custom setting of opening speed and sensitivity
- Direct and stepless adjustment of the opening width via 0-10 V input
- Immediate test run possible due to integrated ventilation button

## Features and technical data

<b>Operating voltage</b>	24 V DC
<b>Connections</b>	1 x drive group 1 x input for external, higher-level signals 1 x 0-10 V input 1 x open collector
<b>Ambient temperature</b>	-5°C to +40°C
<b>Dimensions (WxHxD)</b>	40.5 x 48.5 x 28.3 mm
<b>Terminals</b>	9 x spring-loaded terminals, max. 1.5 mm <sup>2</sup>
<b>Protection class</b>	IP20

## Ordering data

<b>Item name</b>	SVB 0-10 V
<b>Item No.</b>	660120

# Custom networking of smart solutions.

The Smart Vent Box allows drive parameters such as opening width and speed to be changed retrospectively without programming. Higher-level signal transmitters, such as a rain or wind sensor, can also be connected. The Smart Vent Box can be connected to any AUMÜLLER S12 actuator. The teach-in process is made very simple via Plug & Play.



Version: 11/2022 ©AUMÜLLER AUMATIC GmbH  
Subject to technical errors and changes

## **aumueller-gmbh.de**

AUMUELLER AUMATIC GmbH  
Gemeindewald 11  
86672 Thierhaupten

Tel +49 8271 8185-0  
Fax +49 8271 8185-155  
Mail [info@aumueller-gmbh.de](mailto:info@aumueller-gmbh.de)

Follow us on social media

